

214 LOW VOC PIPE CLEANER

General Description:

E-Z Weld Cleaner is a clear blend of solvents formulated as a fast-acting cleaner to effectively remove oil and grease from the surfaces of PVC / uPVC, CPVC, ABS and STYRENE pipe and fittings.

Application:

E-Z Weld Pipe Cleaner can be used on PVC, CPVC, ABS and Styrene. Use applicator supplied with can or clean cloth to apply it, wipe off with clean dry cloth.

Always follow instructions on the label.

Application temperature: -10°F to 110°F (-23°C to 43°C)
Storage temperature: -10°F to 110°F (-23°C to 43°C)

Quality Assurance:


Every batch of cleaner is carefully checked and monitored to assure consistently high quality standards. Records of every batch are kept. All ingredients are purchased from approved suppliers.

Physical properties:

Color: Clear
Body: Regular
Specific Gravity: 0.790
Shelf Life: 3 years (unopened can)

LOW VOC (VOLITILE ORGANIC COMPOUND)

Maximum VOC per SCAQMD 1171: 25 g/l

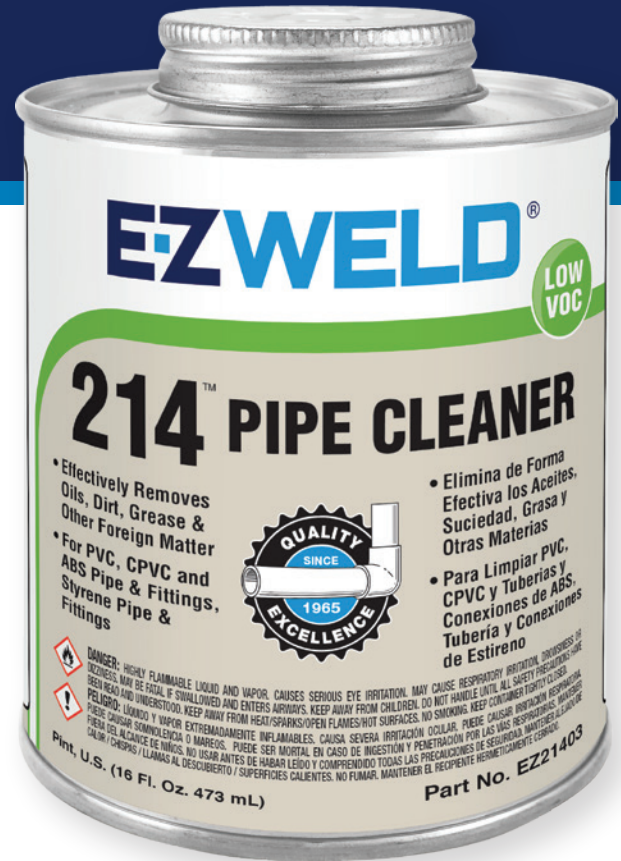

Availability:

Size	Part No. Regular	(UPC No.)
1/4pt	EZ21401	892996002614
1/2pt	EZ21402	892996002621
Pt	EZ21403	892996002638
Qt	EZ21404	892996002645
Gal	EZ21405	892996002652

Pt. And Qt. cans are supplied with dauber inside cap. Gallon sizes supplied with plain cap only.

214 LOW VOC PIPE CLEANER

Packaging:

Size	¼ Pt	½ Pt	Pt	Qt	Gal
Fluid oz	4	8	16	32	128
Liters	0.12	0.24	0.47	0.95	3.78
Units per case	24	24	12	12	6
Weight per case - Lb.	9.5	16	15.5	28	54
Weight per case - Kg	4.32	7.27	7.05	12.73	24.55
Cubic feet per case	0.260	0.420	0.404	0.762	1.221
Cubic meter per case	0.007	0.012	0.011	0.022	0.035
Cases per pallet	145	90	88	56	27

Safety Precautions:

Ensure adequate ventilation to avoid vapor build up which may cause flash fire. Vapor build up may also cause dizziness, headaches or eye watering. If symptoms are experienced use respiratory protection (NOISH/MSHA TC-23C or equivalent) or leave area and provide more fresh air. Avoid contact with eyes, skin and clothing by use of safety glasses and gloves. Professionals should consult ASTM Standard F402 - 18 Standard Practice for Safe Handling of Solvent Cements, Primers, and Cleaners Used for Joining Thermoplastic Pipe and Fittings. Professional users should also read the Safety Data Sheet for the product.

Inhalation: If breathing is difficult vacate to fresh air. If breathing problems persist seek immediate medical attention.

Eyes: Flush eyes thoroughly with water for 15 minutes. Get immediate medical attention.

Internal: If swallowed give 1 or 2 glasses of water immediately, call physician, hospital or poison control immediately.

DO NOT INDUCE VOMITING.

Shipping / Transportation:

Material packaged in less than a liter size is exempted under "Limited Quantity Rules" by DOT. These packages may be shipped with the description ORM - D Consumer Commodity. Packages shipped under this description are not subject to shipping paper requirements for flammable materials.

For a liter and larger sizes (gallon and above container):

Proper Shipping Name: Compound Cleaning Liquid

Flammable Class: 3

UN No: UN 1993

Packing Group: PG II

REV/12/18